







Triplex Pump
(600 hours maintenance-free)



Axial Pump
(6000 hours maintenance-free)

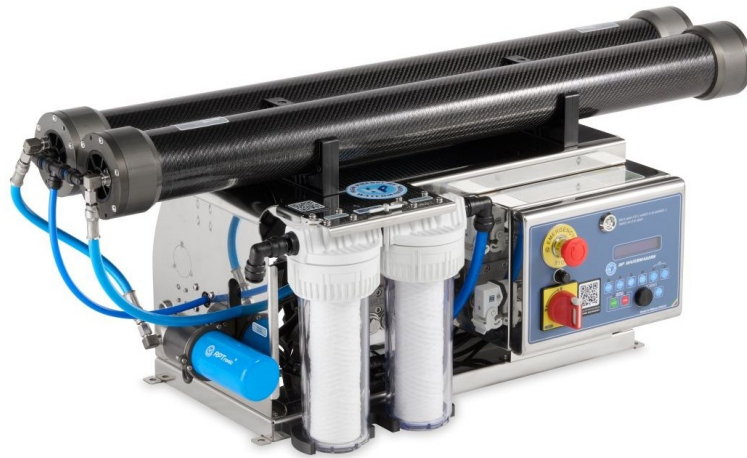

Part-NET and BiBi® port

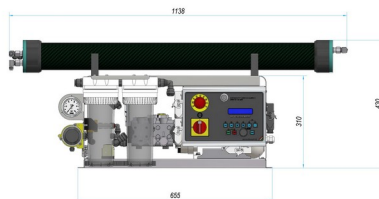

Production 260 L/h

Available Voltages: 230V 50Hz – 230V 60Hz – 380V 50Hz – 440V 60Hz

THIS UNIT CONSISTS OF THE FOLLOWING:

- 1 X Remote Control Panel
- 1 X HP VAL AUTOMATIC 3-WAY Flushing Valve
- 1 X HP RP TRONIC AUTOMATIC Pressure Regulation Valve (Patented)
- 1 X AISI 316 LOWARA 2HMS3 Feed Pump
- 1 X AISI 316 High Pressure Pump – SW1B1514-000
- 4 X HPWATERMAKERS Carbon Fiberglass Pressure Vessels - 31540
- 4 X HPWATERMAKERS Osmotic Membranes - SW30 31540
- 1 X Removable AISI 316 Electrical Control Panel
- 1 X PLC Control System – with settable parameters and DIAGNOSTIC SYSTEM*
- 1 X Pressure Control System (min 20 – max 60 bar), pump and membrane protection
- 1 X Salinity Control System (400uS) with timed alarm and automatic shutdown
- 1 X High Pressure Gauge
- 1 X Pressure Sensor
- 1 X Production Flow Meter
- 1 X Cartridge Pre-Filtration System (Activated carbon + 5 micron protection)

	HP SCA 260
Hourly Flow Rate L/h	260
Nominal Hourly Flow Rate L/h	332
Daily Flow Rate L/day	6240
Nominal Daily Flow Rate L/day	7968
Product Conductivity uS	400
Installed Power kW	2,2
Total Weight Kg	85

Flow rates are calculated with a feed water TDS of 35000 ppm at 25°C and 60 Bar

	DIMENSIONS
Width	1138 mm
Height	430 mm
Depth	455,65 mm

	CURRENT DRAW AT 230V 50HZ
High Pressure Pump	12A
Low Pressure Pump	3A

	CONNECTIONS
Seawater Inlet	1"
Flushing Tank Inlet	1/2"
Concentrate Discharge	1/2"
Production	1/2"